

Fast heat dissipation







Easy installation



Easy maintenance




Ultra-thin and light weight


High strength


High precision

## **Cabinet appearance**


safety protection design high reliability and Long service life








500\*500Y Curved

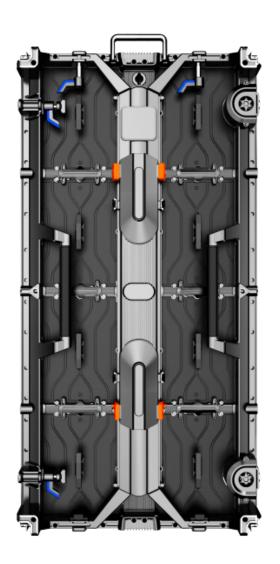

500x1000Y Flat

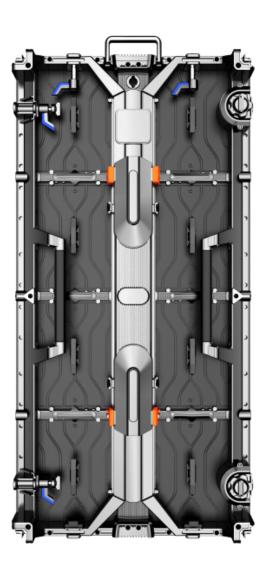


500x5000Y Curved

# Support for front and back maintenance power box use HUB design

Double maintenance, simple operation, fast maintenance,


truly save worry and effort for customers

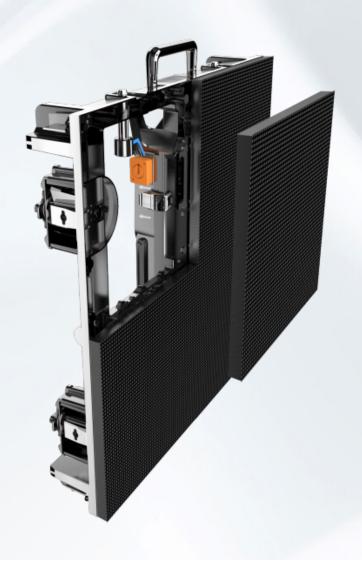

## **Modeling display**

It can be customized to splice any cabinets

Inner arc Outer arc or Curved screens can be spliced at will

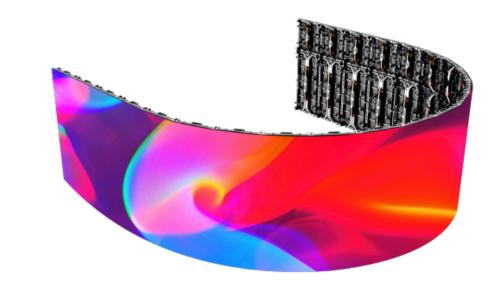



U-shaped assembly




Magic Cube Screen

#### Annular assembly




Inner and outer arc assembly

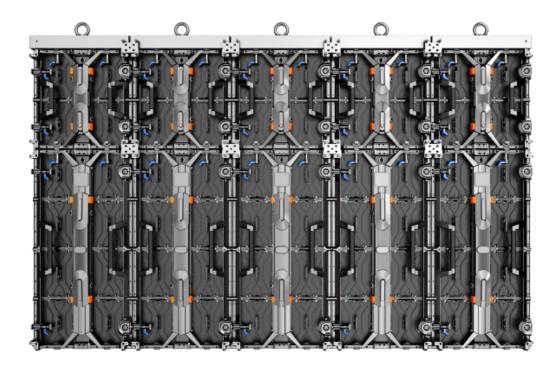

Hanging to install

## **Application scenarios**

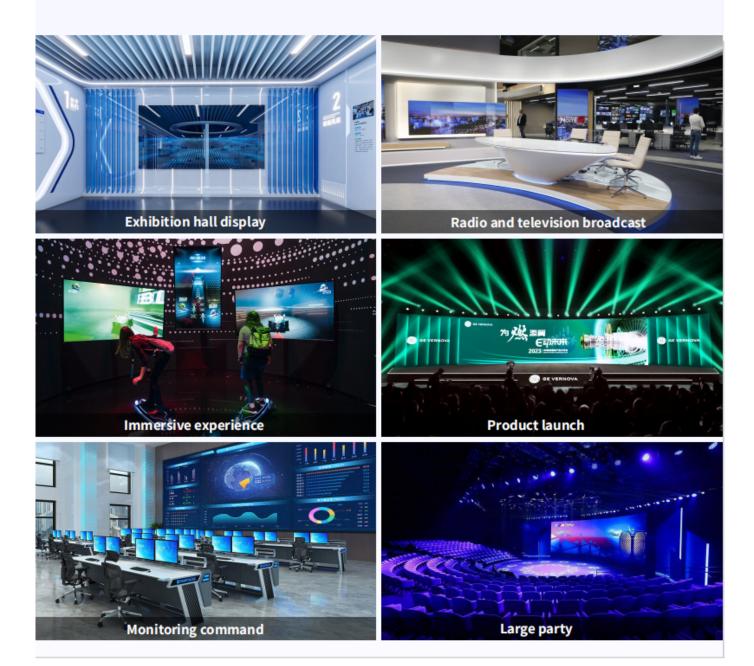

## **Specification parameter**

| product   | 500*500Y flat   | 500*500Y curved         | 500*1000Y flat  | 500*1000Y curved                              |
|---|---|-------------------------|---|---|
| specification                                   | 500 (W) *500 (H) *68 (D) mm   |                         | 500 (W) *1000 (H) *68 (D) mm  |   |
| Weight does not contain modules/ power supplies | ЗКG   | 3.6KG                   | 4.6KG   | 5.2KG   |
| pitch   | P1.953/P2.5/P2.604/P2.976/P3.91/P4.81                                 |                         |   |   |
| Module size                                     | 250*250mm   |                         |   |   |
| Material  | Magnesium alloy   |                         |   |   |
| Installation                                    | Hoisting, base mounting, fixed mounting                               |                         |   |   |
| Use environment                                 | Indoor/Outdoor  |                         |   |   |
| color   | Black/customizable  |                         |   |   |
| radian  | flat  | -6°/-3°/0°/3°/6° curved | flat  | -6°/-3°/0°/3°/6° curved                       |
|   | 2 sets of upper and lower<br>locks, 2 sets of left and<br>right locks | 2 sets of curved locks  | 2 sets of upper and lower<br>locks, 2 sets of left and<br>right locks | 2 sets of curved locks                        |
| standard Accessories                            |   |                         | <u> </u>  |   |
|   | 2 power strips  | 1.5 connecting plates   |   | beam (optional) - 0.5 m<br>I 1 m hanging beam |